

Slangklämna

SR 1934

Svart Nylon 6.6




Detaljnr.	Dimensioner (mm)		Antal/förp.
	Slang diameter	W	
135010159902	6.6 - 8.0	5.0	100
135010259902	8.0 - 9.2	5.0	100
135010359902	9.2 - 10.5	5.0	100
135010459902	10.5 - 12.0	6.0	100
135010659902	12.8 - 15.0	7.0	100
135010759902	15.0 - 17.2	7.0	100
135010859902	17.0 - 18.5	7.0	100
135010959902	18.2 - 20.5	7.0	100
135011059902	20.5 - 23.0	7.0	100
135011159902	22.0 - 25.0	7.0	100
135011259902	25.0 - 28.0	7.0	100
135011359902	27.0 - 30.0	7.5	100
135011459902	29.5 - 32.5	7.5	100
135011559902	32.5 - 35.5	8.0	100
135011659902	35.0 - 38.5	8.0	50
135011759902	38.0 - 41.5	8.0	50
135011859902	41.0 - 44.5	8.0	50
135011959902	44.0 - 47.5	8.0	50
135012059902	47.0 - 50.5	8.0	50
135012159902	50.0 - 53.5	8.0	50
135012259902	53.0 - 57.0	8.0	50
135012359902	56.5 - 60.5	8.0	50
135012459902	60.0 - 65.0	8.0	50
135012559902	66.0 - 70.0	8.0	50
135012659902	70.0 - 75.0	8.0	50
135012759902	76.0 - 80.0	8.0	50
135012859902	80.0 - 85.0	8.0	50

Stoppering

SR 1933

Svart POM

- För axlar med förtillverkade spår
- Utskjutande kant för enkelt av och på sättande

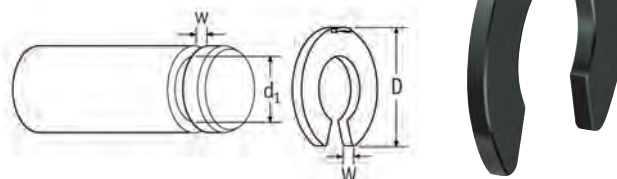


Detaljnr.	Dimensioner (mm)					Antal/förp.
	D	d1	W	w	Tube Diameter	
011202359905	6.0	2.3	1.0	1.05	3.0 - 4.0	1000
011203259905	7.0	3.2	1.0	1.05	4.0 - 5.0	500
011204059905	9.0	4.0	1.1	1.15	5.0 - 7.0	500
011205059905	11.0	5.0	1.1	1.15	6.0 - 8.0	500
011206059905	14.0	6.0	1.3	1.35	7.0 - 11.0	500
011207059905	14.0	7.0	1.3	1.35	8.0 - 11.0	500
011209059905	18.5	9.0	1.4	1.5	10.0 - 14.0	500
011212059905	23.0	12.0	1.6	1.7	13.0 - 18.0	500

Fixeringsring

SR 1938

Röd POM

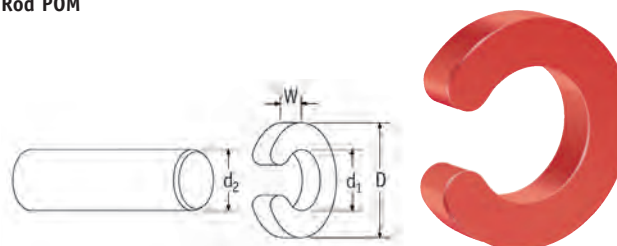

Detaljnr.	Dimensioner (mm)				Antal/förp.
	D	d1	d2	W	
011103000505	6.0	2.5	3.0	2.0	500
011104000505	7.5	3.5	4.0	2.5	500
011105000505	9.0	4.5	5.0	2.5	500
011106000505	11.0	5.3	6.0	3.0	500
011108000505	13.0	7.0	8.0	3.0	500
011110000505	16.0	9.0	10.0	3.5	500
011112000505	19.0	11.0	12.0	4.0	500