


Silikonslang +260°C

Kan även fås i kapade bitar på begäran.

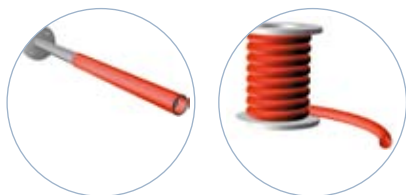

Artikelnummer	ID (mm)	YD (mm)	Längd (m)
---------------	---------	---------	-----------


Transparenta			
Artikelnummer	ID (mm)	YD (mm)	Längd (m)
SS-4020	2.0	4.0	25
SS-4030	3.0	4.0	25
SS-5020	2.0	5.0	25
SS-5025	2.5	5.0	25
SS-5030	3.0	5.0	25
SS-6030	3.0	6.0	25
58-39162	3.5	6.5	25
SS-6040	4.0	6.0	25
SS-7040	4.0	7.0	25
58-39161	4.5	7.5	25
SS-8040	4.0	8.0	25
SS-8050	5.0	8.0	25
58-39160	5.5	8.5	25
SS-8060	6.0	8.0	25
SS-9050	5.0	9.0	25
SS-9060	6.0	9.0	25
58-39163	6.5	9.5	25
SS-10050	5.0	10.0	25
SS-10060	6.0	10.0	25
SS-10070	7.0	10.0	25
58-39159	7.5	10.5	25
SS-10080	8.0	10.0	25
SS-11070	7.0	11.0	25
SS-11080	8.0	11.0	25
SS-12060	6.0	12.0	25
SS-12080	8.0	12.0	25
SS-12090	9.0	12.0	25
SS-120100	10.0	12.0	25
SS-13080	8.0	13.0	25
SS-14080	8.0	14.0	25
SS-140100	10.0	14.0	25
SS-150100	10.0	15.0	25
SS-160100	10.0	16.0	25
SS-160120	12.0	16.0	25
SS-180100	10.0	18.0	25
SS-180130	13.0	18.0	25
SS-190160	16.0	19.0	25
SS-200150	15.0	20.0	25
SS-220160	16.0	22.0	25
SS-220190	19.0	22.0	25
SS-230150	15.0	23.0	25
SS-240180	18.0	24.0	25
SS-250160	16.0	25.0	25
SS-250200	20.0	25.0	25
SS-270200	20.0	27.0	25
SS-320250	25.0	32.0	25

Artikelnummer	ID (mm)	YD (mm)	Längd (m)
---------------	---------	---------	-----------

Röd färg			
Artikelnummer	ID (mm)	YD (mm)	Längd (m)
35-ST0040	1.0	4.2	30.5
35-ST0062	1.6	4.8	30.5
35-ST0080	2.0	5.2	30.5
35-ST0093	2.4	5.5	30.5
35-ST0109	2.8	5.9	30.5
35-ST0125	3.2	6.4	30.5
35-ST0140	3.6	6.7	30.5
35-ST0156	4.0	7.1	30.5
35-ST0172	4.4	7.5	30.5
35-ST0187	4.8	7.9	30.5
35-ST0203	5.2	8.3	30.5
35-ST0218	5.5	8.7	30.5
35-ST0234	5.9	9.1	30.5
35-ST0250	6.4	9.5	30.5
35-ST0281	7.1	10.3	30.5
35-ST0312	7.9	11.1	30.5
35-ST0343	8.7	11.9	30.5
35-ST0375	9.5	12.7	30.5
35-ST0406	10.3	13.5	30.5
35-ST0437	11.1	14.3	30.5
35-ST0500	12.7	15.9	30.5
35-ST0625	15.9	19.1	15.3
35-ST0750	19.1	22.2	15.3
35-ST0875	22.2	25.4	15.3
35-ST0937	23.8	27.0	15.3
35-ST1000	25.4	28.6	15.3
35-ST1125	28.6	31.8	15.3
35-ST1250	31.8	34.9	15.3
35-ST1375	34.9	38.1	15.3
35-ST1500	38.1	41.3	15.3
35-ST1625	41.3	44.5	15.3
35-ST1750	44.5	47.6	15.3
35-ST1875	47.6	50.8	15.3
35-ST2000	50.8	54.0	15.3

Kapad silikonslang +300°C

Ett urval av standarddetaljer för dimension M3 – M12. Andra dimensioner på begäran.

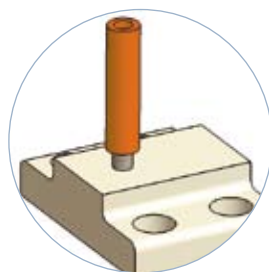

NY

Artikelnummer	Passar till gänga	L (mm)	Förp.
---------------	-------------------	--------	-------

58-39803	M3	20	1000
58-39804	M4	20	1000
58-39805	M5	25	1000
58-39806	M6	30	1000
58-39808	M8	35	1000
58-39810	M10	40	500
58-39812	M12	45	500

Silikonsnöre +260°C

Andra dimensioner på begäran.



Artikelnummer	YD (mm)	Längd (m)
---------------	---------	-----------

58-SN010	1.0	25.0
35-UC0070	1.8	30.5
58-SN020	2.0	25.0
35-UC0093	2.4	30.5
35-UC0103	2.6	30.5
58-SN030	3.0	25.0
35-UC0125	3.2	30.5
58-SN035	3.5	25.0
58-SN040	4.0	25.0
35-UC0156	4.0	30.5
35-UC0187	4.7	30.5
58-SN050	5.0	25.0
58-SN053	5.3	25.0
35-UC0210	5.3	30.5
58-SN057	5.7	25.0
58-SN060	6.0	25.0
35-UC0250	6.4	30.5
58-SN070	7.0	25.0
35-UC0275	7.0	30.5
35-UC0312	7.9	30.5
58-SN080	8.0	25.0
58-SN084	8.4	25.0
58-SN090	9.0	25.0
35-UC0375	9.5	15.3
58-SN100	10.0	25.0
35-UC0437	11.0	15.3
58-SN110	11.0	25.0
58-SN120	12.0	25.0
35-UC0500	12.7	15.3
58-SN130	13.0	25.0
58-SN140	14.0	25.0
35-UC0562	14.3	15.3
58-SN150	15.0	10.0
58-SN160	16.0	10.0
58-SN190	19.0	10.0
58-SN250	25.0	10.0